



C10a Cube Speaker



M10a Stage Monitor

The C10 and M10 series loudspeakers are for professional applications where demanding situations exist. The loudspeaker possesses characteristics inherent to loudspeakers costing many times more. These characteristics include an extra heavy duty crossover network, high quality heavy duty components, and excellent fidelity.


These loudspeakers are happy installed or on the road. The dispersion and frequency response make them perfect for critical applications while the SPL abilities give these speakers the power to overcome background noise.

The sealed cabinet provides very clear deep bass response that isn't boomy sounding. High end response is both crisp and hi-fidelity while the midrange has the transient clarity of a studio monitor. The M10a makes a great floor monitor for recording studios and the C10a provides many clubs, churches and auditoriums with full-range audio power.

The construction technique is the same as all other Rexroat Sound products. 13 ply Baltic Birch, screws & glue, heavy duty grill (62% open area, 16 gauge), and a custom-specified heavy duty finish.

- Proprietary 10" coaxial transducer
- Point source imaging
- 1" B&C Italian high frequency driver
- Sealed cabinet that provides deep smooth bass response
- Tight conical dispersion pattern:
 - ✓ Good for long throws and reverberant environments
 - ✓ Excellent clarity and imaging
- High SPL output:
 - ✓ 122 dB long term (continuous)
 - ✓ 127 dB maximum
- High Fidelity / Low Distortion sound
- Ceiling mount bracket or fly points included (C10a)
- Custom colors and finishes



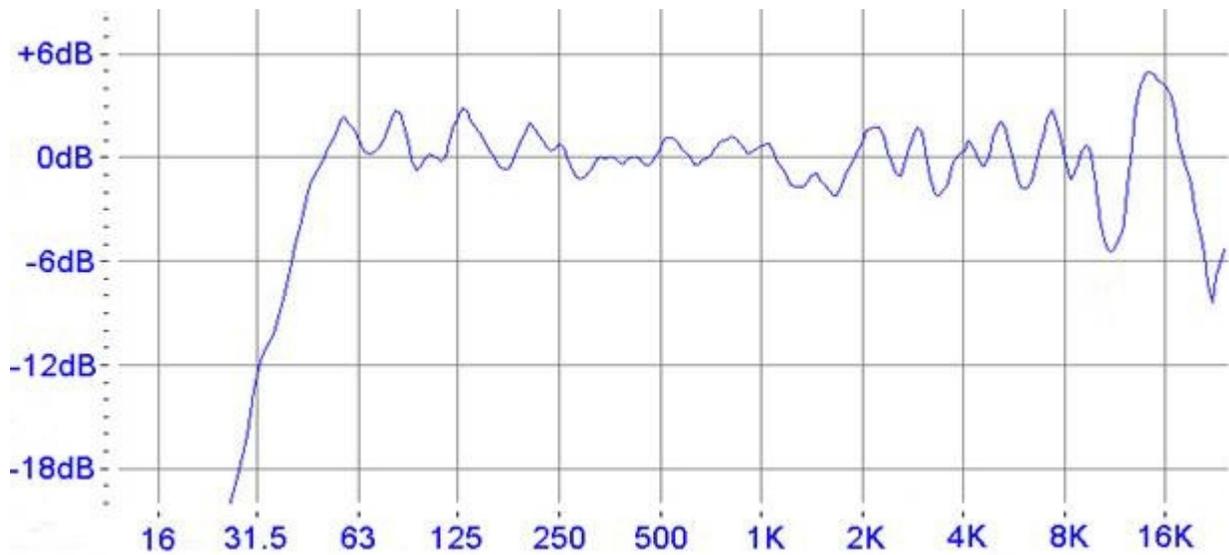

- Efficiency:** 99dB 1W/1m
- Power handling:** 200 Watts Continuous Noise
400 Watts Nominal Program
- Usable range:** 35Hz - 23Khz
- Low-frequency:** Proprietary 10" with aluminum coaxial horn
- High-frequency:** 1" B&C compression driver
- Crossover:** 4Khz 12dB/oct. with phase correction
- SPL output:** 122dB continuous, 127dB peak
- Dispersion:** -6dB @ 70 degrees
- Input Jacks:** Dual NL4
- Hardware:** C10a – 3 fly points or ceiling mount
M10a – 4 rubber feet
- Weight:** 33 lbs
- Dimensions:** C10a – (HWD) 11 ⁷/₈" x 13" x 15"
M10a – (HWD) 10 ¹/₈" x 13" x 14 ³/₈"

